



Brüel & Kjær Vibro

A member of the NSK Group



Product specifications and ordering information

VC-8000

Universal Monitoring Module - UMM

Copyright © 2021 Brüel & Kjær Vibro GmbH

All rights to this technical documentation remain reserved.

Any corporeal or incorporeal reproduction or dissemination of this technical documentation or making this document available to the public without prior written approval from Brüel & Kjær Vibro GmbH shall be prohibited. This also applies to parts of this technical documentation.

Product specifications and ordering information **VC-8000 Universal Monitoring Module - UMM**,
S1077787.002 / V05, en, date of issue: 08.11.2021

Brüel & Kjær Vibro GmbH

Leydheckerstrasse. 10
64293 Darmstadt
Germany

Phone: +49 6151 428 0
Fax: +49 6151 428 1000

Hotline

Phone: +49 6151 428 1400
E-Mail: support@bkvibro.com

Brüel & Kjær Vibro A/S

Lyngby Hovedgade 94, 5 sal
2800 Lyngby
Denmark

Phone: +45 69 89 03 00
Fax: +45 69 89 03 01

Homepage

www.bkvibro.com

BK Vibro America Inc

1100 Mark Circle
Gardnerville NV 89410
USA

Phone: +1 (775) 552 3110

Corporate E-Mail

info@bkvibro.com

Table of Contents

Overview	4
Features and Benefits	8
Specifications	10
Ordering Information.....	17
Spare UMM Cards	17
Accessories.....	18
Manuals and Software.....	18
Wiring and Outline Diagrams	19

Overview

The VC-8000 Universal Monitoring Module (UMM) provides four channels of machinery monitoring. Each channel is individually configurable for nearly 50 different types of vibration, position, and speed measurements on rotating and reciprocating machinery (refer to page 2 for a comprehensive list of channel types and measurements returned). The UMM occupies a single slot in a VC-8000 monitoring system rack and uses 24 Vdc instrument power as supplied by the VC-8000 Rack Connection Module (RCM). Each UMM provides all necessary transducer power, signal conditioning, alarm comparison, and relay logic functions needed to provide four channels of continuous machinery monitoring and shutdown protection. It complies with the requirements of American Petroleum Institute Standard 670 for monitoring systems and is completely configurable using VC-8000 configuration software. Up to 15 UMM cards can reside in a single 19" VC-8000 rack, providing up to 60 channels of continuous machinery protection. Each module provides basic status indication for its channels as required by API 670. When used with the optional rack touchscreen, real time display of vibration levels, alarm statuses, and other information is available for all channels concurrently on a single screen for "at a glance" convenience. When ordered with optional condition monitoring capabilities, the module streams high-speed static and dynamic (i.e., waveform) data to the rack's System Access Module (SAM) where it is available to software such as Setpoint® CMS and/or the rack's embedded high-speed "flight recorder" on SD Card or Solid State Drive.



UMM Channel Types Part 1		Measurements Returned																										
		Acceleration – Aero	Acceleration - Diagnostic	Acceleration – Enveloped	Acceleration – Low Freq	Acceleration – REB (normal)	Acceleration – REB (Slow)	Accel – REB Tracking	Acceleration – RMS (Slow)	Acceleration – Standard	Acoustic	Generic Dynamic	Radial Vib – Air Machine	Radial Vib – Diagnostic	Radial Vib – Hydro7	Radial Vib – Shaft Abs ^{2,6}	Radial Vib – Shaft Rel	Radial Vib – SMAX	REBAM	Rod Position	Velocity – Diagnostic	Velocity – Aero	Velocity – Standard	Velocity – Low Freq	Velocity – Hydro7	Velocity – Recip Crank	Velocity – Shaft Abs ^{2,6}	
Non-tracking Bandpass Filtered	Overall (wideband) amplitude			•						•																•		
	84 dB/octave roll-on/off																											
	84 dB/oct roll-on & 72dB/oct roll-off													9 ¹											9 ¹			
	48 dB/octave roll-on/off	2 ¹																					2 ¹					
	36 dB/octave roll-on/off									8 ¹																		
	24 dB/octave roll-on/off		•	2 ¹	•	•	•	•	2 ¹														2 ¹	•			•	
	6 dB/octave roll-on/off										2 ¹	4 ¹	3 ¹		•	3 ¹	•	•	•									
	Enveloped band 1 (cage)			•																								
	Enveloped band 2 (IRBP)			•																								
	Enveloped band 3 (ORBP)			•																								
	Enveloped band 4 (Ball Spin)			•																								
Enveloped band 5 (2X Ball Spin)			•																									
Tracking Vector Filtered	1X Amplitude - tracking vector filter		PT		P T			PT	PT			PT	PT	PT	PT	PT	PT			PT	PT		PT	P T	PT	PT	PT	
	1X Phase - tracking vector filter		PT		P T			PT	PT				PT		PT	PT	PT				PT	PT		PT	P T		PT	
	2X Amplitude - tracking vector filter		PT						PT			PT	PT	PT		PT	PT					PT	PT		PT			
	2X Phase - tracking vector filter		PT						PT				PT			PT	PT						PT	PT				
	nX Amplitude - tracking vector filter		PT						PT			PT	PT			PT							PT	PT				
	nX Phase - tracking vector filter		PT						PT				PT			PT							PT	PT				
	Cage - tracking vector filter								PT																			
	IRBP - tracking vector filter								PT																			
	ORBP - tracking vector filter								PT																			
	Ball Spin - tracking vector filter								PT																			
	2X Ball Spin - tracking vector filter								PT																			
	4X Amplitude - tracking vector filter												PT															
	Tracking 1X band (48 dB/oct)		PT																				PT					
	Sensor DC Bias Voltage		•	•	•	•	•	•	•	•	•	•											•	•	•	•	•	•
	High-Freq Demodulated PK Stretch					•	•	•																				
	Rotor Region																				•							
Crank Angle																						•						
Prime Spike						•	•															•						
SMAX																												
Shaft absolute vibration															•													
Rod Position Magnitude																							•					
Rod Position Phase																							•					
Probe 1 Gap Voltage													•	•	•	•	•	•	•	•	•							
Probe 2 Gap Voltage																												



UMM Channel Types Part 2	Measurements Returned																		
	Air Gap	Axial Position	Case Expansion (single)	Case Expansion (dual) ²	Diff Expansion (DE)	Complementary DE ¹	Ramp DE – one ramp ²	Ramp DE – two ramps ²	Discrete Input (on/off)	Dynamic Pressure	Eccentricity	Impact – Recip ³	Phase Trigger / Speed ⁴	Process Variable ⁵	Reverse Rotation ²	Rod Drop / Runout	Valve Position	Zero Speed ²	Cylinder Pressure – Recip
Overall (wideband) amplitude												•							
84 dB/octave roll-on/off									4 ¹			•							
Tracking 1X band (48 dB/oct)																			
Sensor DC Bias Voltage	•								•		•		•						
Digital State (hi/low or on/off)								•											
Axial Position		•																	
Axial Vibration Amplitude		•																	
Absolute Case Expansion – LVDT 1			•	•															
Absolute Case Expansion – LVDT 2			•	•															
Case Exp Difference (LVDT 1 – LVDT 2)			•																
Composite Diff Exp (Probes 1 & 2)					•	•	•												
Position 1					•	•	•	•											
Position 2					•	•	•	•											
Probe 1 Gap Voltage		•			•	•	•	•		•		•		•		•			
Probe 2 Gap Voltage		•			•	•	•	•		•		•		•		•			
PP Eccentricity / Runout						•	•	•		•									
Min Position & Max Position										•									
Process Variable Amplitude													•						
Ecc Position										•									
Speed												•	•		•		•		
Rotor Acceleration												•	•						
Peak Speed												•	•				•		
Impact Count											•								
Average Piston Position																•			
Average Probe Gap																•			
Triggered Piston Position																PT			
Triggered Probe Gap																PT			
Reverse Speed														•					
Number of Reverse Rotations														•					
Reverse Peak Speed														•					
Minimum Air Gap	•																		
Valve Position (% open or % closed)																	•		
Zero Speed																		•	
Compression Ratio																			•
Discharge Ratio																			•
Maximum Pressure																			•
Minimum Pressure																			•
Peak Rod Compression																			•
Peak Rod Tension																			•
Rod Reversal Degrees																			•
Suction Pressure																			•

NOTES:

•	Measurement always available.
PT	Measurement available only with a valid phase trigger signal; a single phase trigger can be associated with multiple channels in a rack.
1	Denotes the number of individually configurable bandpass regions available for the channel. Any region can be configured with filter corners for wideband (i.e., “overall”) amplitude or narrowband measurements.
2	Denotes a measurement that uses two sensors and requires two UMM channels.
3	Seismic acceleration and velocity channels return a peak amplitude that is computed as peak-to-peak /2. However, recip impact channel types return a “true max” acceleration amplitude that is computed by first rectifying the signal and then detecting the peak. This amplitude detection method is unique to impact channels because the signal is almost always highly asymmetrical and pk-pk /2 will not give reliable results for setting impact count threshold levels.
4	Phase triggers may only be assigned to UMM channel 4 in rack slots 4-9. Maximum of 6 phase trigger per 16-P rack; 5 phase triggers per 8-P rack; 1 phase trigger per 4-P rack. Speed channels (no phase capabilities) can be configured for any UMM channels without restrictions.
5	UMM channels configured for process variable measurements are able to provide loop power and accept a wider variety of input signals than TMM channels. TMM channels accept 4-20mA input types only, do not provide loop power, and require an external shunt resistor. Refer to TMM datasheet S1077788 for additional information.
6	Shaft Absolute measurements use two transducers: a shaft-observing proximity probe and a casing-mounted velocity transducer. The shaft relative and casing absolute channels must reside on the same UMM. The shaft relative channel returns both shaft relative and shaft absolute parameters; the other channel returns casing absolute parameters. Shaft absolute parameters are computed as the vector combination of shaft relative displacement and integrated casing velocity (i.e., casing absolute displacement).
7	Hydro channels cannot be configured for machines with rotational speeds higher than 600 rpm.
Refer to VC-8000 manual S1079330 for comprehensive information on configurable channel types and data returned for each. Some measurements shown for a given channel type are optional; they may be left un-configured if desired.	



Features and Benefits

Simple, reliable, self-contained design reduces likelihood of failures from inter-module dependencies.

Highly reliable design utilizes just three transitional connectors from signal input to relay output – significantly reducing possible failure points in the critical machinery protection path.

SIL Certified Architecture

VC-8000 is suitable for use as part of a SIS, to implement safety instrumented functions up to SIL 2 when configured, installed, and commissioned properly as per instructions provided within the Operations and Maintenance Manual (S1079330) and safety manuals (C107577, C107576, C107578, C107579).

Multi-state monitoring enables each process change to have unique alarm limits ensuring your machine is always protected.

Individually programmable 4-20 mA outputs – each of the four 4-20mA outputs on a UMM can be assigned to any parameter from any channel on that UMM.

Clear, intuitive labeling on both faceplate and removable connectors.

Individual SPDT electro-mechanical relays for each channel – can be voted with other channels whether in the same or different rack modules.

SPDT = Single Pole, Double Throw

Convenient connection to all 4 channels of buffered signal outputs via innovative RJ45 connector (RJ45-to-BNC cables sold separately). Standard CAT5/6 cables can be used for long runs.

Flexible signal conditioning – each UMM channel can be individually configured from an available list of nearly 50 different channel types (see page 2); most channel types return multiple parameters, any or all of which can be used for alarming if desired.

Fewer channel pair constraints – A and B inputs for dual-voting axial position measurements can reside on separate UMM cards for increased reliability; XY probe pairs can reside on different rack modules as well.¹

Up to six² phase reference signals in a single rack – channel 4 of any UMM in rack slots 4-9 can be configured to accept a once-per-turn phase trigger signal. Speed (no phase capabilities) can be assigned to any UMM channel, without restrictions.

1. Depending on relay and channel voting complexity, XY probe pairs on the same UMM can improve the total amount of relay voting logic allowed in a rack.
2. Half-size rack limited to 5 phase reference inputs (slots 4-8). Quarter-size rack limited to 1 phase reference input (slot 4).

Distributed power regulation for improved reliability – each UMM converts its 24 Vdc input power to all regulated voltages needed by on-board processors and transducers, reducing the potential for rack single-point failures compared to systems that generate regulated voltages for the entire rack in a centralized power supply.

Powerful onboard processor delivers 24-bit A-to-D resolution for highly **accurate** measurements – no potentiometers, no drift, no calibration required.

Digital MODBUS® communications via System Access Module (SAM) can be used in lieu of (or simultaneously with) analog 4-20 mA outputs for flexibility when integrating with other instrumentation.

Unparalleled ease of configuration via VC-8000 configuration software's intuitive spreadsheet-like user interface – easily cut and paste to/from Microsoft® Excel® and most other programs.

Provides loop power for process variable transmitters. Non-vibration signals from process transmitters and other devices providing ± 4 to ± 20 mA, +1 to +5 Vdc, 0 to ± 10 Vdc, and 0 to +5 Vdc proportional signals can be easily included in the VC-8000 system for display, alarming, and trending. For 4-20mA loop-powered input devices, the UMM can be configured to provide +24V, eliminating the need for external loop power.

Simplified spare parts requirements. Because every measurement in the VC-8000 system is made with just two module types (UMMs and TMMs), only two monitoring types need to be carried as spares. For systems without temperature measurements, only a single monitoring module type is used.

No jumpers or DIP switches. Every option in the VC-8000 system is configured via software. Cards do not have to be removed from the rack.

Connectivity to condition monitoring software. When ordered with condition monitoring enabled, a UMM becomes a UMM-CM and is able to stream high-resolution waveforms to the rack's System Access Module (SAM) where it can be stored on an embedded "flight recorder" hard drive and/or SD Card, or to an external computer or OSIsoft® PI System server. The data can then be viewed with our Setpoint® CMS Display software.

Highly Flexible Rack Control

The UMM discrete channel type can be used not only to accept and display discrete on/off type signals, but to control rack states such as trip multiply, bypass, inhibit, etc. When invoked from the wiring terminals on the RCM, these control states are applied rack wide. When invoked using UMM discrete input channels, these states can be individually applied to user-configurable groups, facilitating better control when multiple machine trains are combined in a rack, each with its own unique trip multiply, bypass, inhibit, and other control needs.



Specifications

All specifications are at +25 °C (+77° F) unless otherwise noted.

Inputs	
Channels	4
Channel Types	Refer to table on page 2 - 3
Transducer Types	<p>Accepts most common industry-standard transducers including proximity, velocity, acceleration, dynamic pressure, LVDT, and 4-20mA in any combination. Configuration software automatically compensates* for OK limits and scale factor changes when I.S. barriers are used.</p> <p>* Compensation is provided for passive (zener-type) barriers only. Active (i.e. galvanic isolation) barriers do not require compensation.</p>
Proximity	
B&K Vibro	
<ul style="list-style-type: none"> ds82x.ds10xx ds82x.ds30xx IN-08x/INA-08x 	<ul style="list-style-type: none"> SD-08x SD-05x SDH-015x
Metrix	Bently Nevada®
<ul style="list-style-type: none"> MX2030 (2- & 3-wire) MX3300 (NSv, 5, & 8 mm) MX7200 (5, 8, & 11 mm) MX3000 (.190 & .300) 	<ul style="list-style-type: none"> 3300 (RAM, 5, 8, & 16 mm) 3300 XL (NSv, 8, & 11 mm) 7200 (5, 8, 11, & 14 mm) 3000*/7000 (.190 & .300) 25, 35, and 50mm <p>* UMM compatible only with newer -24 Vdc drivers, not original -18Vdc models. -24 Vdc drivers for 3000 probes/cables readily available from Metrix and others.</p>

Acceleration	
B&K Vibro	
<ul style="list-style-type: none"> AS-020/ASA-020 AS-022/ASA-022 AS-030 AS-062/ASA-062 AS-063/ASA-063 AS-068/ASA-068 AS-069/ASA-069 AS-070 AS-073 AS-079 AS-080 AS-477 	
Others	Bently Nevada®
All +24V IEPE sensors	330400 330425
Piezo-Velocity	
Others	Bently Nevada®
<ul style="list-style-type: none"> All +24V IEPE sensors 	<ul style="list-style-type: none"> 330500 330525 190501
Moving-Coil Velocity	
B&K Vibro	
<ul style="list-style-type: none"> VS-068 VS-069 	
Metrix	Bently Nevada®
<ul style="list-style-type: none"> 5485C 	<ul style="list-style-type: none"> 9200 (2-wire)
Aeroderivative Interface Modules	
VibroMeter	Bently Nevada®
<ul style="list-style-type: none"> GSI 122 	<ul style="list-style-type: none"> 86517 86497
LVDTs	
B & K Vibro	Bently Nevada®
<ul style="list-style-type: none"> 2534, 1" or 2" 	<ul style="list-style-type: none"> 24765 135613

Impact	
<ul style="list-style-type: none"> • Metrix IT681X 	
Dynamic Pressure	
<ul style="list-style-type: none"> • Dytran 2006V2 	
Phase Trigger, Reverse Rotation, Zero Speed	
<ul style="list-style-type: none"> • Same sensors as listed in “proximity” section at left • +24 V Proximity Switch • Magnetic Speed Pickup 	
Process Variable	
<ul style="list-style-type: none"> • 4-20 mA transmitters, two-wire, loop-powered and externally powered (+4 to +20 mA, -4 to -20 mA, 0 to +5V, +1 to +5V, 0 to +10V, and 0 to -10 V) 	
Differential Expansion	
Metrix	Bently Nevada
<ul style="list-style-type: none"> • MX10037 – MX10042 (11 mm) 	<ul style="list-style-type: none"> • 3300 (16 mm) • 3300 XL (11 mm) • 7200 (11 & 14 mm) • 25mm, 35mm, 50mm (Ext. Range)
Other	
<ul style="list-style-type: none"> • Microphones • Discrete Inputs (dry contact, +3.3V logic, +5V logic) • Custom scale factors and OK limits are supported in the configuration software for additional flexibility, allowing compatibility with many additional transducer types not listed on this page. Consult the factory prior to use of transducers not listed above to ensure that the sensor’s output impedance and power requirements are compatible with the UMM. 	

Channel Voltage Range	-24 Vdc to +19 Vdc NOTE: OK limits constrained to -21 Vdc to +18.5 Vdc
Input Power Voltage	<ul style="list-style-type: none"> • Continuous: +22 to +30 Vdc (SIL: +23.1 to +26 Vdc) • Transient: +18 to +36 Vdc
Power Consumption	≤ 8W when input power voltage is 22 to 26 Vdc.
Transducer Input Impedance	<ul style="list-style-type: none"> • 3-wire proximity and acceleration: 10 kΩ • 2-wire proximity: 250 Ω • Constant-current acceleration and piezo-velocity: ≥ 60 kΩ • Moving-coil velocity: 100 kΩ



Outputs	
Relays	<ul style="list-style-type: none"> • Number: 4 per UMM • Type: SPDT, form C • Sealant: epoxy • Min. Switched Current: 10 mA • Max switched power (resistive): 5A @ 48 Vrms or 30 Vdc • Maximum voltage in hazardous areas: 30 Vdc • Life: > 10,000 cycles • Software-configurable options: <ul style="list-style-type: none"> ○ Energize or de-energize to trip ○ 4 SPDT or 2 “virtual” DPDT ○ Can be driven by alarm condition(s) of any channel(s) in the rack via user-programmable logic ○ Any logic driving a relay can be configured for latching or non-latching operation
4-20 mA	<ul style="list-style-type: none"> • Number: 4 (1 per channel) • Output proportional to channel programmable full scale range* • Overrange: up to 125% of full scale (24 mA) • Max Load Resistance (RL): 950 Ω with 22 Vdc power; 1350 Ω with 30 Vdc power • Resolution: 16 bit • Update Rate: < 100 ms • Short-circuit protected: Yes • Fault Clamp Value: Programmable** <p>* The 4-20mA outputs are tied to the direct (overall) value of each channel. They are not currently programmable for other parameters (such as gap voltage), nor can a single channel be programmed to drive multiple 4-20 mA outputs. Each channel has its own, dedicated 4-20 mA output.</p> <p>** The fault clamp value can be individually programmed for each channel as either 2 mA or a user-selected value within the full-scale range (such as 0 thrust position).</p>
LEDs	<ul style="list-style-type: none"> • OK LED (1 per UMM) <ul style="list-style-type: none"> Green – monitor operating correctly, all channels OK Yellow – one or more channels are faulted Red – fatal hardware error Off – monitor has lost power • Bypass LED (1 per UMM) <ul style="list-style-type: none"> On – one or more channels bypassed Off – No channels bypassed

	<ul style="list-style-type: none"> • Relay LEDs (1 per channel) <ul style="list-style-type: none"> On – Relay in alarm state Off – Relay not in alarm state
Transducer Power	<ul style="list-style-type: none"> • Proximity probes* and voltage-mode accelerometers: -24Vdc (current limited to 25 mA) • Constant-current accelerometers and piezo-velocity devices: 3mA <p>* The UMM does not provide -18 Vdc transducer power as used by certain older proximity probe systems such as the Bently Nevada 3000 series. UMM compatibility of such systems can be achieved with -24Vdc drivers readily available from Metrix, allowing the user to retain their existing probes and extension cables.</p>
Buffered Transducer Outputs	<p>Locations</p> <ul style="list-style-type: none"> • All 4 channels available simultaneously via a single “quick connect” RJ45 receptacle on the front of each UMM. A special RJ45-to-4-BNC cable is available as an optional accessory (p/n 100431). • Each monitor also provides buffered output signals to the backplane where they are available via a 30-pin connector set on the Rack Connection Module. • 3 programmable BNC connectors are provided on the rack faceplate when the touchscreen display is ordered. They are dynamically assignable to any UMM channels in the rack. <p>Impedance</p> <p>550 Ω</p> <p>Short-Circuit Protected</p> <p>Yes</p> <p>Signal Type</p> <p>Raw (unfiltered, no integration) transducer signal in mV/engineering units</p>

Configuration	
Method	PC-based VC-8000 configuration software
Connection Type	<p>Local: Mini-B USB “on-the-go” receptacle on UMM*</p> <p>* When a System Access Module (SAM) is installed in the rack, the USB receptacle on any UMM can be used to configure every module in the rack.</p>
Memory Location	Configuration data is stored in non-volatile RAM on each UMM and is retained until changed. Batteries or other power sources are not required to maintain a module’s configuration data.
Signal Conditioning	
A/D Resolution	24 bits
Dynamic Range	105 dB
Signal-to-Noise Ratio	105 dB
Integration	Configurable per-channel for: <ul style="list-style-type: none"> • None • Single (Velocity-to-Displacement or Acceleration-to-Velocity)
Peak Detection	Each channel individually configurable for: <ul style="list-style-type: none"> • True Peak-Peak* • True Peak** • True RMS** <p>* Radial vibration channels only ** Seismic channels only</p>
Accuracy	<p>Vibration / Position Channels</p> <p>Direct</p> <ul style="list-style-type: none"> • Typical: $\pm 0.3\%$ of full scale • Minimum: $\pm 1\%$ of full scale <p>Gap / Bias</p> <ul style="list-style-type: none"> • Typical: ± 0.07 V • Minimum: ± 0.24 V

Speed / Phase Channels	
	<p>Phase: ± 1 degree</p> <p>Speed:</p> <ul style="list-style-type: none"> • 1 - 30 rpm: ± 0.1 rpm • 30 - 7,500 rpm: ± 1 rpm • 7,500 - 60,000 rpm: $\pm 0.1\%$ • 60 - 100 krpm: $\pm 0.2\%$
Speed/Phase Channel Settings	<ul style="list-style-type: none"> • Threshold: Configurable for Auto or Manual • Manual Threshold Range: +18 to -22 V • Hysteresis: 0.2 to 2.5 V in 0.1 V increments <p>NOTES:</p> <ol style="list-style-type: none"> 1. The speed/phase channel type is compatible with proximity probes, magnetic pickups, and proximity switches. For phase measurements, proximity probes are recommended. 2. Speed/phase channel types are configurable for single or multiple events per revolution. Non integer values can be entered in the channel configuration settings to accommodate compound gear arrangements and complex ratios. 3. A multiple event per revolution target (such as a toothed wheel) is not recommended for phase readings. The tooth for which the system triggers will be arbitrarily selected from one machine run to the next and will not allow consistent phase readings if the phase trigger signal is interrupted and then reestablished, such as when shutting the machine down and restarting or correcting a wiring problem.



Radial Vibration Channel Filters	Direct	<ul style="list-style-type: none"> Type: Band pass Rollon/Rolloff: 6 dB/octave, 84 dB/octave roll-on & 72 dB/octave roll-off (hydro) - 3 dB Passband: Configurable for 4 Hz to 4000 Hz or 1 Hz to 600 Hz
	Gap	<ul style="list-style-type: none"> Type: Low pass Rolloff: 6 dB/octave -3 dB corner: 0.09 Hz
	Fault / NOT OK	<ul style="list-style-type: none"> Type: Low pass Rolloff: 6 dB/octave -3 dB corner: 2.4 kHz
Axial Position Channel Filters	Direct	<ul style="list-style-type: none"> Type: Low pass Rolloff: 6 dB/octave -3 dB corner: 1.2 Hz
	Gap	<ul style="list-style-type: none"> Type: Low pass, Rolloff: 6 dB/octave -3 dB corner: 0.41 Hz
Velocity Channel Filters	Direct	<ul style="list-style-type: none"> Type: Band pass with individually adjustable LF and HF corners Roll-on/Roll-off: 24 dB/octave (48 dB/octave for aero channel types) Low-frequency (LF) -3 dB corner: Configurable from 2 Hz to 400 Hz* High-frequency (HF) -3dB corner: configurable from 40 Hz to 5 kHz** <p>* The low-frequency corner cannot be set lower than 10 Hz when signal integration is used. ** The HF corner cannot be more than 1000 x LF corner. For example, if the LF corner is set to 2 Hz, the HF corner cannot be greater than 2000 Hz.</p>

Acceleration Channel Filters	Direct	<ul style="list-style-type: none"> Type: Band pass with individually adjustable LF and HF corners Rollon/Rolloff: 24 dB/octave (48 dB/octave for aero channel types) Low-frequency (LF) -3 dB corner: Configurable from 2 Hz to 3000 Hz* High-frequency (HF) -3dB corner: configurable from 30 Hz to 25 kHz** <p>* The low-frequency corner cannot be set lower than 10 Hz when signal integration is used. ** The HF corner cannot be more than 1000 x LF corner. For example, if the LF corner is set to 5 Hz, the HF corner cannot be greater than 5000 Hz.</p>
	Bias	<ul style="list-style-type: none"> Type: Low pass Rolloff: 6 dB/octave -3dB corner: 0.05 Hz
	Fault / NOT OK	<ul style="list-style-type: none"> Type: Low pass Rolloff: 6 dB/octave -3dB corner: 2.4 kHz
Hydro Channel Filters	Direct	<ul style="list-style-type: none"> Type: Band pass with individually adjustable LF and HF corners Roll-on/Roll-off: 84 dB/octave roll-on & 72 dB/octave roll-off Low-frequency (LF) -3 dB corner: Configurable from 0.7 Hz to 200 Hz* High-frequency (HF) -3dB corner: configurable from 2 Hz to 200 Hz <p>* The low-frequency corner cannot be set lower than 10 Hz when signal integration is used.</p>
	Bias	<ul style="list-style-type: none"> Type: Low pass Rolloff: 6 dB/octave -3dB corner: 0.02 Hz
	Fault / NOT OK	<ul style="list-style-type: none"> Type: Low pass Rolloff: 6 dB/octave -3dB corner: 2.4 kHz

Alarms	
Number	2 per measurement* (Alert and Danger) * Axial position measurements have 4 alarms (2 normal direction, 2 counter direction). A measurement may be configured with any or all of its alarms turned off. Multi-state configuration allows 15 additional alarm states to be configured.
Type	Alarming is individually configurable for each measurement as Over, Under, In Band, or Out of Band.
Multi-State	15 unique, user-defined states. A machine state can be defined by criteria of Discrete Input channels, Phase Trigger speed ranges or direction of change of speed. Each machine state can be configured with different alarming criteria. ^{1,2} 1. All alarm types are the same for all configured states. 2. UMM-FS does not support multi-state alarms
Configurable Settings	Time Delay <ul style="list-style-type: none"> Individually adjustable per alarm, per channel. Minimum Delay: 100 ms* Maximum Delay: 100 sec Adj. Increments: 100 ms <p>* Speed / phase channels have a minimum delay of 1 second to prevent misuse as part of a speed control and/or overspeed circuit.</p>
	Latching / Non-latching Alert and Danger setpoints are individually configurable per alarm, per channel for latching or non-latching
	Range Individually adjustable, per alarm, per channel Minimum: 0% of full scale Maximum: 100% of full scale* Adj. increments: 2 decimal points of precision, in the channel's engineering units * A channel's Alert setpoint must be less than its corresponding Danger setpoint.

	Enable/Disable Any or all alarms for a channel may be enabled or disabled individually, allowing operation without setpoints (or with a reduced number of setpoints).
Environmental	
Operating Temperature	-20 °C to +65 °C
Storage Temperature	-40 °C to +85 °C
Operating Temperature Ramp	Do not exceed 0.5C/minute
Storage Temperature Ramp	Do not exceed 10C/minute
Humidity	5% to 95%, non-condensing
CE Mark Directive	
ESD	Contact: 6 kV* Air: 8 kV * Criteria B
Radiated EMI Susceptibility	80 – 1000 MHz: 20 V/m* 1.4 – 2 GHz: 6 V/m* 2 – 2.7 GHz: 3 V/m* * Criteria A
Magnetic Field	30 A/m, Criteria A
EFT Burst	2 kV, Criteria B
EFT Surge (Signal Lines, Power Line)	2 kV line to ground, Criteria B
Conducted RFI (Signal Lines, Power Lines)	150 kHz to 80 MHz, Criteria A
Conducted RF Common Mode Immunity (Signal Lines, Power Lines)	15 Hz – 150 Hz: 10 V* 150 Hz – 1.5 kHz: 1V* 1.5 kHz – 150 kHz: 10 V* * Criteria A
Radiated EMI Emissions	30 dB µV/m @ 30 m, 30 MHz – 1000 MHz, Class A
Conducted Emission	60 dB µV/m @ 30 m, 0.5 MHz – 30 MHz, Class A



EN

AC Power Voltage Dip Immunity	One-half period, 30% reduction, Criteria B
AC Power Voltage Dip Interruption	250 periods, 95% reduction, Criteria B
DC Power Voltage Dip Immunity	10 ms, 60% reduction, Criteria B
DC Power Voltage Dip Interruption	30 ms, 100% reduction, Criteria B
Low Voltage Directive	Council Directive 2014/35/EU Low voltage using B & K Vibro-supplied power supply (rack ordering option – CC) or other Low Voltage Directive approved supply.

Hazardous Area Approvals



Gardnerville, NV 89410 USA | www.bkvibro.com

ATEX: II 3 G Ex nA nC IIC 160°C(T3) Gc; ITS15ATEX48339X;
IECEX: Ex nA nC IIC 160°C(T3) Gc; IECEX ETL 17.0045X;

US: Class I, Zone 2, AEx nA nC IIC T3 Gc; Class I, Division 2, Groups A, B, C, D, T3C; Conforms to ANSI/UL STD. 61010-1, UL STDS. 60079-15 & 60079-0

CANADA: Ex nA nC IIC T3 Gc; Class I, Division 2, Groups A, B, C, D, T3C; Certified to CAN/CSA STD. C22.2 Nos. 61010-1-12, 60079-0, 60079-15 & 213-M1987

Input (Transient): V_{MIN} = 18V; V_{MAX} = 36V; P_{MAX} = 160W See User Manual
Input (Continuous): V_{MIN} = 22V; V_{MAX} = 30V;
Operating Temp.: -20°C ≤ T_A ≤ 65°C
Relay: V_{MAX} = 30VDC; I_{MAX} = 5A

Serial Number:

Part Number:
VC-8000/RCK

Part Number:
VC-8000/RCK

Recommended Passive Intrinsic Safety Barriers

MTL 796(-) or equal	B & K Vibro, Metrix, and Bently Nevada proximity probes Bently Nevada 330400, 330425, and 23732 accelerometers
MTL 760ac or equal	Metrix 5485C Bently Nevada 9200 (2-wire) Other compatible moving-coil velocity sensors
MTL 787(+) or equal	Metrix SA6200, SA6350, and SV6300 acceleration and velocity sensors Bently Nevada 330500, 330525, and 190501 Velomitor® sensors Other compatible constant-current accelerometers and piezo-velocity sensors

Recommended Active Intrinsic Safety Barriers with Galvanic Isolation

Pepperl + Fuchs KFD2-VR4-Ex1.26 or equal	Metrix and Bently Nevada proximity probes Metrix and Bently Nevada moving-coil velocity sensors Metrix SA6200, SA6350, and SV6300 acceleration and velocity sensors Bently Nevada 330400, 330425, and 23732 accelerometers Bently Nevada 330500, 330525, and 190501 Velomitor® sensors Other compatible constant-current accelerometers and piezo-velocity sensors
---	---

Physical

Size	9.1" H x 9.0" D x 1.0" W (231 mm x 229 mm x 25 mm)	
Weight	11.4 oz (324 g)	
Rack Slots Required	One (may reside in rack slots 2-16)	
Allowable Wire	Connector	AWG
	Alarm Relays	16 – 28
	Analog Outputs	20 – 24
	Signal Inputs	16 – 28

Safety Integrity Level (SIL) Capability

VC-8000 is suitable for use as part of a SIS, to implement safety instrumented functions up to SIL 2 when configured, installed and commissioned properly as per instructions provided within the Operations and Maintenance Manual (doc S1079330) and safety manuals:

- VC-8000 Backplane and Rack Safety Manual (C107579)
- RCM Safety Manual (C107578)
- TMM Safety Manual (C107576)
- UMM Safety Manual (C107577)

Ordering Information

Spare UMM Cards

When ordering spare UMM cards, use the part number below. Refer to the VC-8000 specification 1077785 when ordering a complete system to specify rack size, module types for each slot, faceplate, touchscreen, mounting style, and other options.



C106803.001

Universal Monitoring Module, Approvals (ATEX, IEC, ETLc)

C107396001

Functional Safety Universal Monitoring Module, Approvals (ATEX, IEC, ETLc)

C1075670011

Universal Monitoring Module Condition Monitoring

NOTES:

1. Used when ordering from the factory to include condition monitoring with the delivered UMM or when performing a field upgrade of existing UMMs to CM-ENABLED versions. Upgrade requires special firmware key, supplied by the factory. When ordered alone, no hardware as a UMM will already be present.



CAUTION

UMM cards are shipped with default factory configuration settings, which are not necessarily suitable for any particular application. Before use, each UMM channel must be configured properly for its application via VC-8000 configuration software. This software is included with each system or UMM ordered and is also available for download at <https://www.bkvibro.com/en/download/software-releases.html>



Accessories

Breakout Cable*

This cable is used when connecting the channels in a single UMM to an external device such as a portable data collector with female BNC jacks. When it is necessary to simultaneously connect channels from multiple UMMs to external instruments, use two or more breakout cables. For ease-of-identification, each BNC connector is numbered under a clear heat-shrink label, corresponding to each UMM channel



number. When longer cable runs are required, simply purchase standard CAT5E cable in the desired length and use an RJ45-to-RJ45 inline connector. Both are readily available from a variety of electronics suppliers.

100431-AA
BNC breakout cable assembly – RJ45 (male) to four BNC (male) - 10 foot (3 m) cable length

*** NOTE:**

For systems with programmable BNC jacks on the VC-8000 faceplate, this cable is not required unless simultaneous connection of more than three (3) channels at a time to an external instrument is necessary.

Manuals and Software

A complete set of VC-8000 manuals and configuration software on USB memory stick is supplied at no extra charge with each order, but must be specified at time of ordering. As languages in addition to English become available, they will be included on the memory stick. The most recent version of manuals and software can be downloaded directly from our website.



NOTE: Manuals are published electronically in Adobe® PDF* format and may be printed and freely distributed. Adobe Reader is required and can be downloaded free-of-charge from www.adobe.com. Hardcopy versions of manuals are also available from the factory for an additional charge.

VC-8000/CSW-AA
VC-8000 Manual and Configuration Software – USB Stick


USB Cable


This cable is used to connect a computer running VC-8000 Configuration Software to the USB port on UMM and TMM modules. The cable is included with part number VC-8000/CSW and does not need to be ordered separately. Order the item below only when replacing a lost or damaged cable.




96014-012
2m (6') USB 2.0 A / Mini-B Cable

Wiring and Outline Diagrams

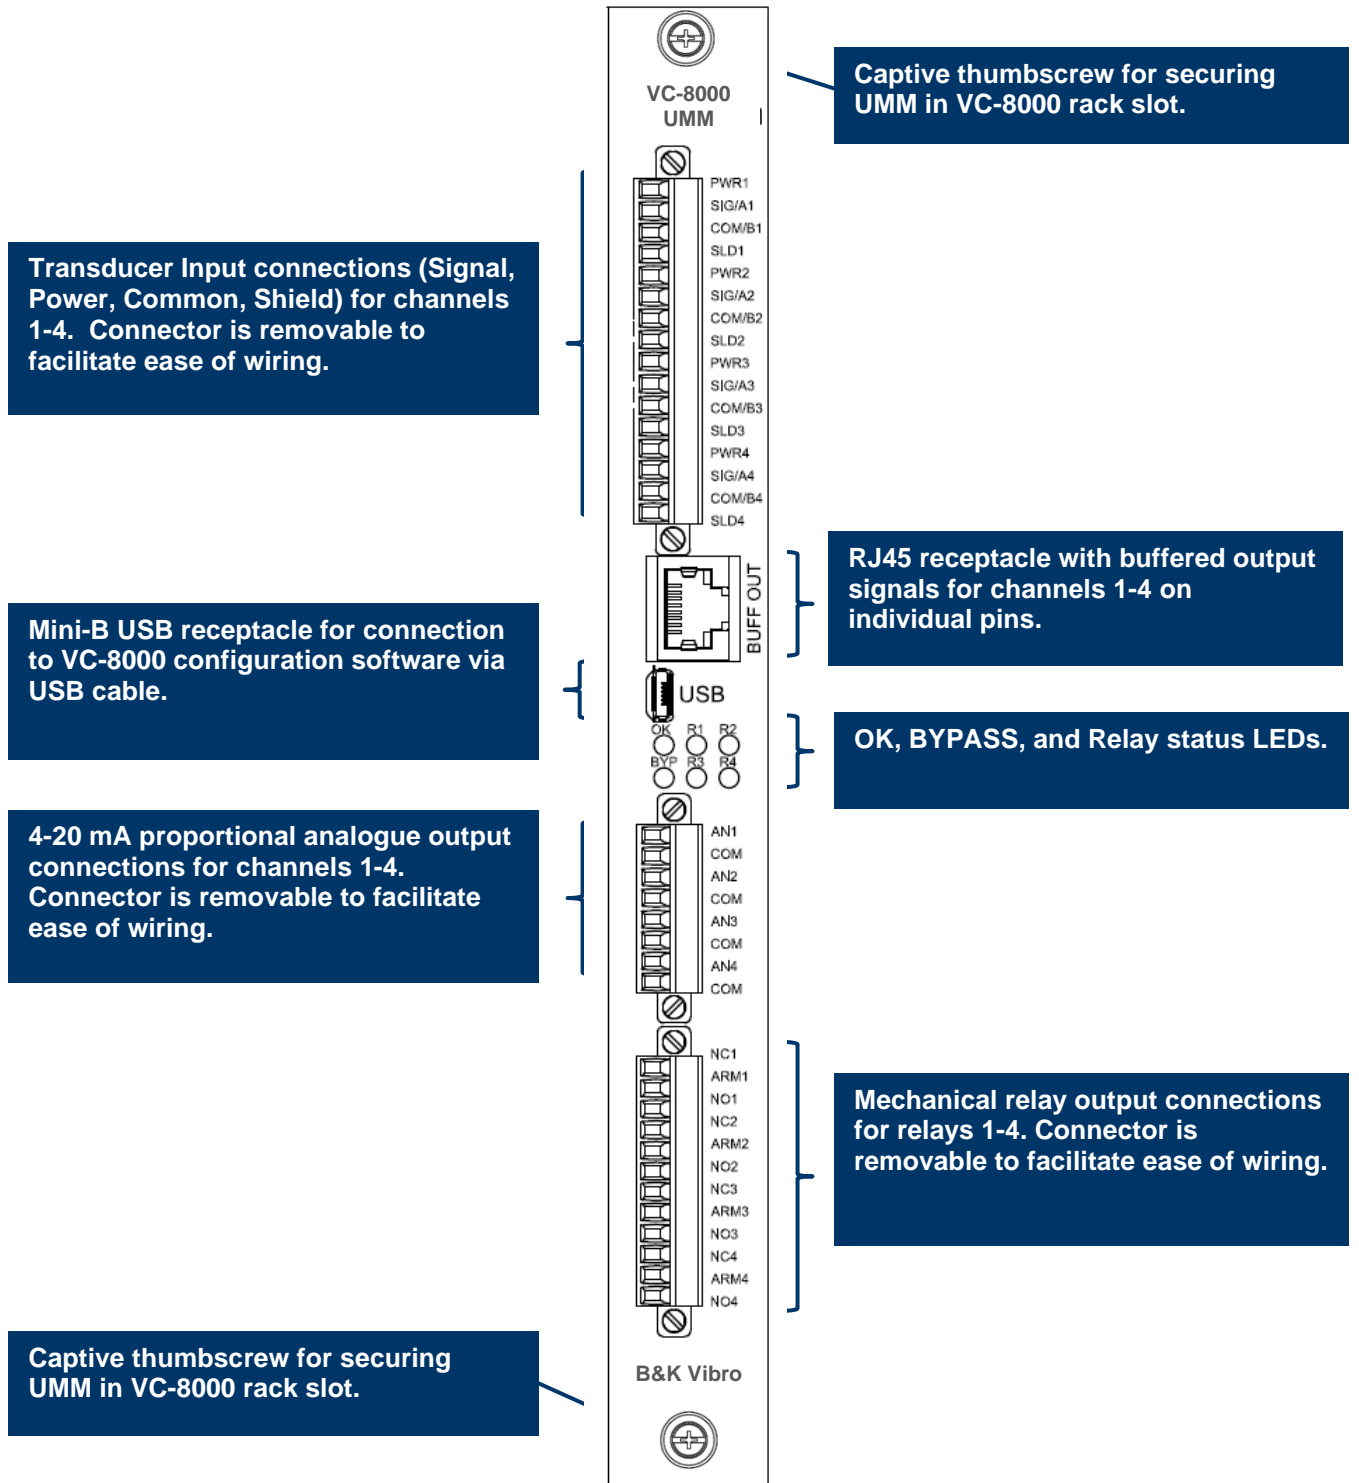

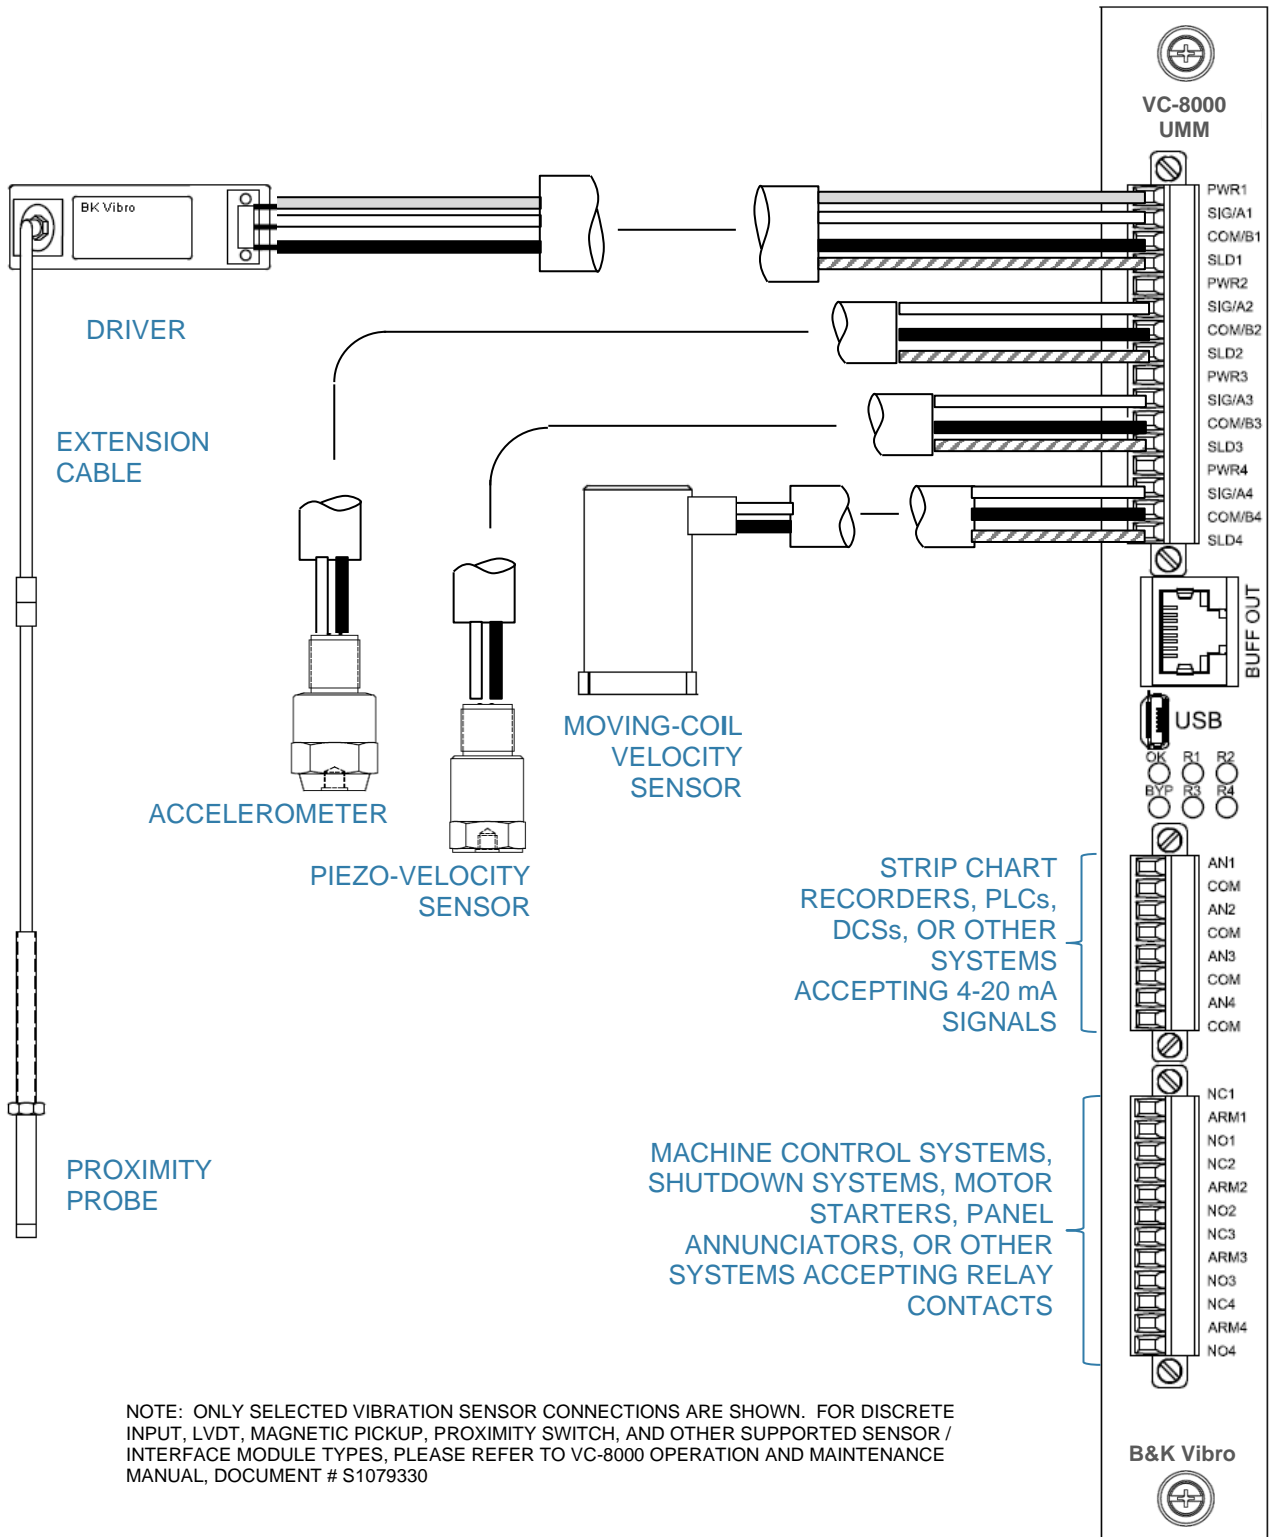

NOTE: ONLY SELECTED VIBRATION SENSOR CONNECTIONS ARE SHOWN. FOR DISCRETE INPUT, LVDT, MAGNETIC PICKUP, PROXIMITY SWITCH, AND OTHER SUPPORTED SENSOR / INTERFACE MODULE TYPES, PLEASE REFER TO VC-8000 OPERATION AND MAINTENANCE MANUAL, DOCUMENT # S1079330

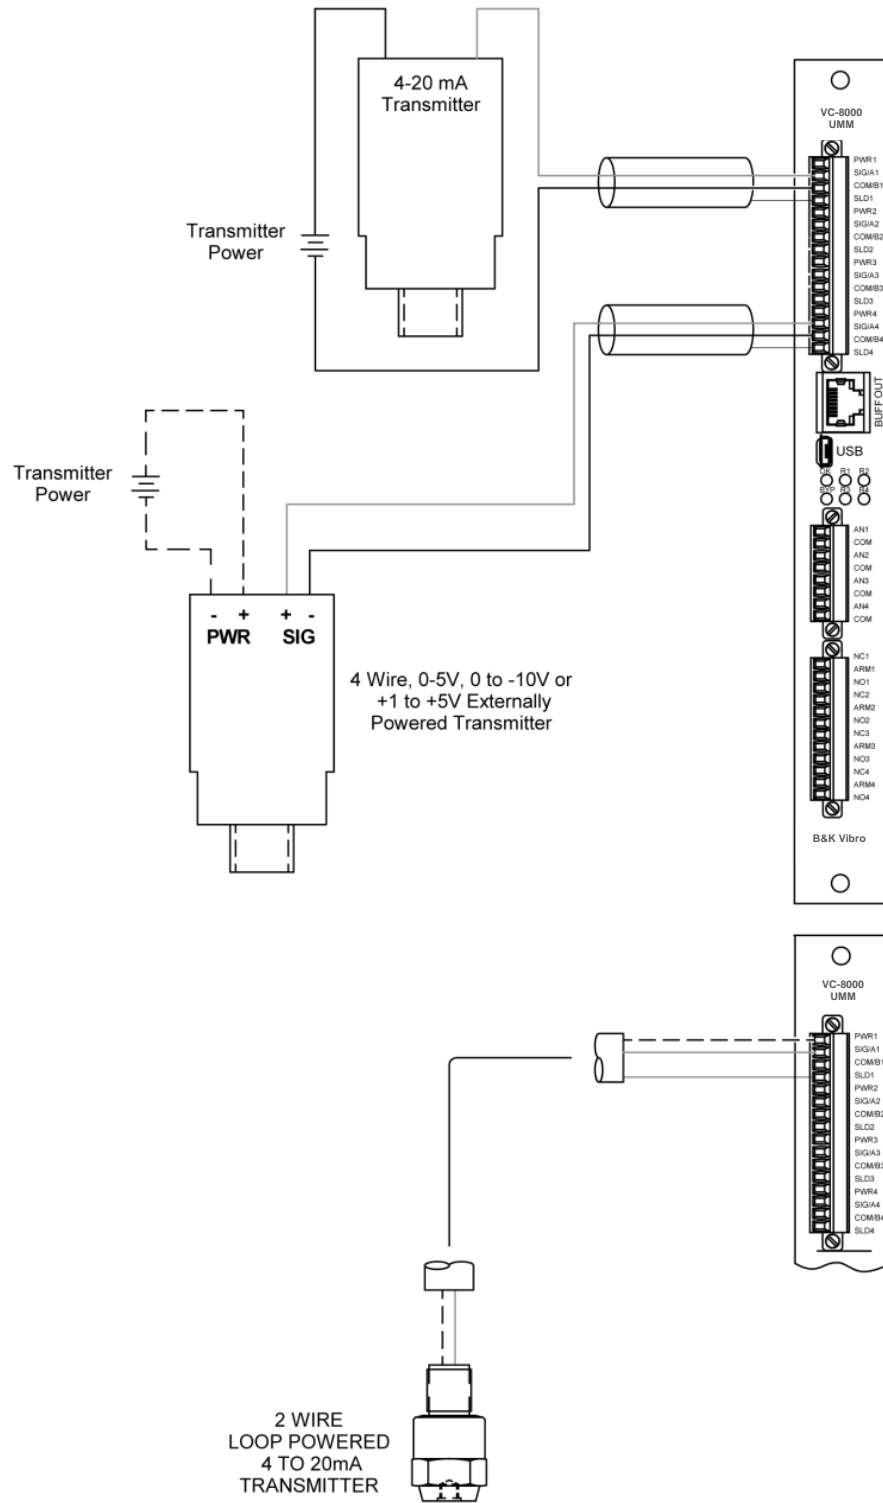

Contact

Brüel & Kjær Vibro GmbH

Leydheckerstrasse 10
64293 Darmstadt
Germany

Phone: +49 6151 428 0
Fax: +49 6151 428 1000

Corporate E-Mail: info@bkvibro.com

Brüel & Kjær Vibro A/S

Lyngby Hovedgade 94, 5 sal
2800 Lyngby
Denmark

Phone: +45 69 89 03 00
Fax: +45 69 89 03 01

Homepage: www.bkvibro.com

BK Vibro America Inc

1100 Mark Circle
Gardnerville NV 89410
USA

Phone: +1 (775) 552 3110

VC-8000 Universal Monitoring Module - UMM •

© Brüel & Kjær Vibro • 11/2021 • S1077787.002 / V05 • Technical alterations reserved!