




AC - 409

Verbindungsleitung vom VC-4000 mit Laptop Connection cable from VC-4000 with the Laptop Câble pour la connexion du VC-4000 au laptop

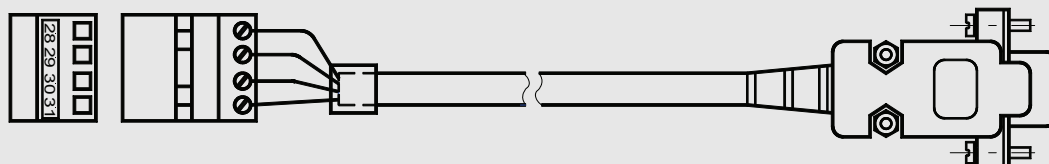

AC409-1 (970129)

Technische Daten	Technical Data	Données techniques
Kabelspezifikation	Cable specification	Spécification de câble
PVC - Kabel Li2Y ST-CY	PVC cable Li2Y ST-CY	Câble PVC Li2Y ST-CY
Kabellänge l = 2 m	Cable length l = 2 m	Longueur du câble l = 2 m
Aufbau 4 x 0,5 mm ² , (Litze 16 x Ø 0,2)	Design 4 x 0.5 mm ² , (wire 16 x Ø 0.2)	Constitution 4 x 0,5 mm ² , (toron 16 x Ø 0,2)
Schirm Alu-kaschierte Polyesterfolie, darüber Cu-Geflecht verzinnt, 90 % Bedeckung	Screen Aluminium laminated polyester foil, covered with tinned Cu braiding, 90 % covering	Blindage Film polyester laminé d'alurecouvert d'un treillis de Cu étamé couvert à 90 %
Mantelisoliation PVC YM ½ nach VDE 0207 Ø ca. 8 mm	Sheathing PVC YM ½ acc. to VDE 0207 Ø approx. 8 mm	Isolation de gaine PVC YM ½ selon VDE 0207 Ø env. 8 mm
Biegeradius ≥ 70 mm	Bending radius ≥ 70 mm	Rayon de courbure ≥ 70 mm
Aderfarben sw, ws, rt, ge	Core colours black, white, red, yellow	Couleurs des brins noir, blanc, rouge, jaune
Betriebsspannung max. 250 V	Operating voltage max. 250 V	Tension de service maxi. 250 V
zulässige Umgebungstemperatur bei fester Verlegung -20 °C ... +70 °C	Permissible ambient temperature with fixed installation -20 °C ... +70 °C	Température ambiante tolérée en cas de pose fixe -20 °C ... +70 °C

Steckerspezifikation	Plug specification	Spécification de connecteur
Buchsenteil 9-polig D-SUB	Plug 9-pole D-SUB	Connecteur mâle 9-pôles D-SUB
Gehäuse metallisiert	Housing metallized	Boîtier métallisé

Anschlusschema Connection diagram Schéma de connexion

